

RedPort™ Maritime Standalone GPS XTRACKER GS



Standard
Mount
Not Included

Standalone Satellite GPS Tracker.

With the RedPort XTracker GS, you can track your assets anywhere within the expansive Globalstar Simplex coverage area without even relying on powering cables (although you can power over Ethernet, as well).

- Easy installation
- View entire fleets of assets on a single online interface
- Determine speed and location
- Geo-fencing (zone alerts)
- View position history
- Low-battery and movement alerts
- Motion-activated tracking with dock-mode for marine use
- Power Over Ethernet or long-life battery pack

RedPort Tracking Solutions

RedPort™ Maritime Standalone GPS XTRACKER GS

Standalone GPS Tracking

Now GPS vessel tracking is easily within grasp - and budget. Using the XTracker GS from RedPort means that even you have no powering options on board, you can rely on long-life satellite GPS tracking for your vessels or assets.

With a handy online tracking platform and a private, dedicated tracking account for one or many tracked vessels, you can easily track your ships or assets in real-time. Powering can be done over Ethernet cable or via a 6V external battery. Reporting is possible up to every 2.5 minutes.

Easy Installation, Easy Setup

The RedPort XTracker GS is enclosed in a 7-inch watertight dome that has been proven to withstand extreme cold and heat. Power over Ethernet cable means that extremely long lines of cable can be run without losing quality or increasing cable size. The tracker can be installed on any standard antenna mount.

Don't have powering options available? No problem, the unit can be ordered with an optional 6V long-life external battery.

RedPort Tracking

RedPort Tracking provides a tracking interface like no other. Giving you the flexibility of viewing all of your vessels on a single screen or individually, showing speed and location of each vessel, providing history of movement and the ability to set up alarms if the vessel crosses a certain pre-determined zone - all of these features and more are available through RedPort Tracking's easy, clean web-interface.

Technical Specs

Power:

Power Over Ethernet or 6V External Battery

Expected Battery Life:

6V, 14Ah = 3 months at 5 min intervals, with 24/7 tracking

6V, 14Ah = 10 months at 5 min intervals, with 8 hours a day of tracking

6V, 14Ah = 2.5 years at 60 min intervals, with 24/7 tracking

6V, 14Ah = 7.5 years at 60 min intervals, with 8 hours a day of tracking

Waterproof:

IPX7 waterproof up to a depth of 1m or for up to 30 min

Operating Temp:

-22 F to 158 F (-30 C to 70 C)

Speed Warning:

Accuracy degrades after 700mph (Mach 1)

Height:

7.28 in Dia (185mm)


Width:

7.08 in high (180mm)

Weight:

4 Lbs (1.81 kg)

Globalstar Simplex Coverage Map

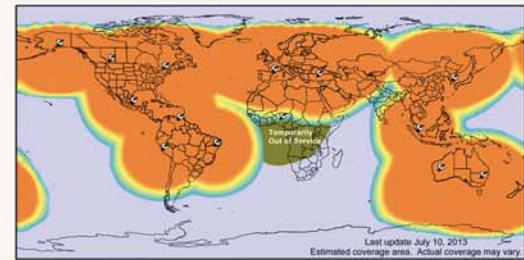

RedPort Tracking Screenshot



Copyright 2014 Global Marine Networks



Think that RedPort Tracking would be a good fit for your tracking requirements? Get in contact with us at www.globalmarinenet.com. We will help you find the best fit for your satellite needs.