



ACR AquaLink™ View

406 MHz GPS With New Digital Display



PLB
















ACR AquaLink™ View

406 MHz GPS Personal Locator Beacon







lives since 1982.



The AquaLink™ View broadcasts a unique registered distress signal that not only tells rescuers where you are, but who you are. The onboard GPS can fix your position to within 100 meters and then utilizes a powerful 406 MHz

Head offshore with confidence. With three

signal to relay your distress call to orbiting satellites. As local Search and Rescue is deployed, a separate homing signal and integrated LED strobe light guide rescuers to your exact location.


The AquaLink™ View sports a digital display that allows you to see all of the beacon's operational activities. The screen displays GPS LAT/LON, operating instructions, usage tips, transmission bursts as well as battery power. The digital display also makes self-testing your beacon simple and easy to understand by visually walking you through the self test step by step. No more relying on listening to beeps and looking for LEDs.

The AquaLink™ View is small enough to be easily carried in a pack or pocket or can be worn on deck, at the helm, in quarters or on a life vest and will float if accidentally dropped overboard. Performing a full functional self test of the PLB's internal circuitry, battery voltage & power, and 406 MHz transmission gives you peace of mind knowing your PLB will work the moment you need it most. ACR Exclusive: Built-in GPS acquisition test mode allows you to test GPS functionality up to 60 times over the life of the battery.

Tap in to the same field-tested rescue technology used by the U.S. Military, U.S. Coast Guard, NATO Special Forces and Arctic explorers.

SPECIFICATIONS

Product Number	2884
Model Number	PLB-350 C
Size	2.3 x 5.8 x 1.45" (5.8 x 14.8 x 3.7 cm)
Weight	9.2 oz (261 g) with lanyard
Battery, Class	Class 2 (non-hazmat) lithium batteries
Battery, Replacem	nent Interval Replacement due six (6) years from da of manufacture or five (5) years after beacon is placed into service, whicheve is first, or after emergency use
Battery, Operation	nal Life Exceeds 24 Hours @ -4°F (-20°C)
Battery, Typical Pe	erformance 30 Hours @ -4°F (-20°C)
Battery, Storage	-40°F to + 158°F (-40°C to +70°C)
Material	Engineered polycarbonate blend
Color	ACR-treuse™ (high visibility yellow)
Activation	Manual
Operation	2 steps: deploy antenna, press ON button. Give clear view of sky
Waterproof	16.40 ft (5 m) @ 1 hr., 33 ft (10 m) @ 10 min. Factory tested @ 70°F, exceeds RTCM waterproof requirements
Radiated Power	6.3W (406 MHz), 50 mW +/-3dB (121.5 MHz)
Accessories	Attachment clip included
Approvals	Cospas-Sarsat, FCC, Canada, R&TTE
Limited Warranty	5 years
Lead Free	Yes

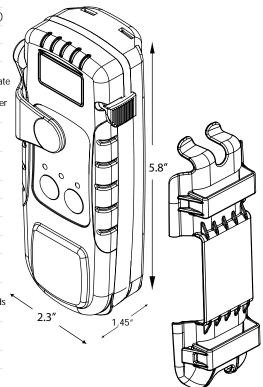

- No Subscription Fees
- Floats
- Super Bright LED Strobe
- Built-in Digital Display
- On Board 66 Channel GPS
- Self-Test and GPS Test Features
- Typical Performance 30 Hours
- Non-Hazmat Battery
- Made in the U.S.A

It is mandatory that you register your PLB. It's fast, easy and free www.beaconregistration.noaa.gov. When activated, the unique identification code in your PLB is linked to the registration database. This way authorities can retrieve valuable information about you and your trip.

The AquaLink™ View is a satellite signaling device of last resort, for use when all other means of self rescue have been exhausted, where the situation is grave and imminent loss of life, limb, eyesight, or valuable property will occur without assistance.

For further information please contact:

ACR Electronics, Inc. 5757 Ravenswood Road Fort Lauderdale, FL 33312

Tel: (954) 981.3333 Fax: (954) 983.5087 Email: sales@acrartex.com

© 2012 ACR Electronics, Inc. 03/12 WWW.ACRARTEX.com